

Patio 6080

Fold-sliding door

Construction: one-framed inward opening fold-sliding door. Can be custom made with comfort (submerged) aluminum sill.

Profiles:

- *Lasita Softline 68*, frame and sash depth 68 mm
- *Lasita Softline 78*, frame and sash depth 78 mm

Type: wooden.

Wood: knot-free glued laminated timber, details in length over 3000 mm are finger jointed.

Tree species: pine, oak, meranti.

Glass unit: standard *Lasita Softline 68* double glazed 26 mm glass unit: 1 energy saving glass, 1 aluminum 18 mm partition bar, argon-filled. U-value of the glass unit 1,1 W/m²K. Standard *Lasita Softline 78* triple glazed 36 mm glass unit: 2 energy saving glasses, 2 thermo-plastic 12 mm partition bars, argon-filled. U-value of the glass unit 0,7 W/m²K.

Seals: *Lasita Softline 68*: 1 frame gasket; *Lasita Softline 78*: 2 frame gaskets and one glazing seal.

Finishing: finished in 3-layer (*Lasita Softline 68*) or 4-layer (*Lasita Softline 78*) system, waterbased colors and glazes, tones according to RAL-catalogue.

Fittings: Roto Patio 6080 fittings.

Handles: Roto handles as a standard, Hoppe handles can be used. Possible to use lockable internal operation handle or internal and external operation handles and locking systems.

Opening Types: folding; sliding; turn operation; turn-tilt operation.

Glass divisions: removable ghost bar, impost, Vienna impost with glued ghost bar, decorative bar inside glass unit.

DIMENSIONS


Frame width (guide rail length) 6000 mm

Sash rebate width (passage sash) 450-1200 mm

Sash rebate width (folding sash) 450-900 mm


Sash rebate height 600-2400 mm

Max. sash weight 80 kg

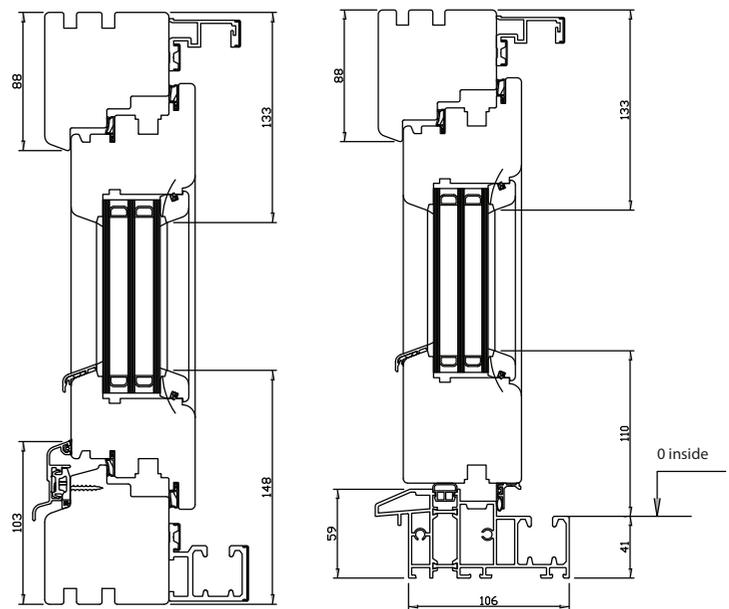

Patio 6080 standard

Patio 6080 with comfort sill

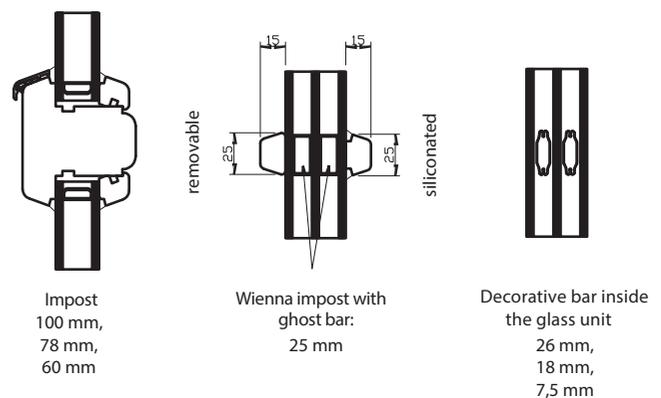

Impost
100 mm,
78 mm,
60 mm

Vienna impost with
ghost bar:
25 mm

Decorative bar inside
the glass unit
26 mm,
18 mm,
7,5 mm

OPENING SCHEMES

