

Patio Life

parallel lifting-sliding door

Construction: one framed sliding opening low comfort-threshold parallel lifting-sliding door. Sash depth 171 mm, frame depth 68 or 78 mm.

Profiles: *Lasita Softline 68, Lasita Softline 78*

Type: wood.

Wood: knot-free glued laminated timber, details in length over 3000 mm are finger jointed.

Tree species: pine, oak, meranti.

Glass unit: standard *Lasita Softline 68* double glazed 26 mm glass unit: 1 energy saving glass, 1 aluminum 18 mm partition bar, argon-filled. U-value of the glass unit 1,1 W/m²K. Standard *Lasita Softline 78* triple glazed 36 mm glass unit: 2 energy saving glasses, 2 thermo-plastic 12 mm Swisspacer partition bars, argon-filled. U-value of the glass unit 0,7 W/m²K.

Seals: special seals.

Finishing: wood – finished in 3-layer (*Lasita Softline 68*) or 4-layer (*Lasita Softline 78 un 78ES*) system, one color standard. Waterbased colors and glazes, tones according to RAL-catalogue. aluminum – anodised (silver, average brown, dark brown) or powder-colored according to RAL-catalogue.

Fittings: Roto Patio Life fittings with hidden micro-ventilation function.

Handles: Roto handles.

Locking: 1) inside handle, outside ventage; 2) inside locking handle outside ventage; 3) handle and centre inside and outside

Opening types: parallel sliding.

Glass divisions: glazing bar, removable ghost bar, Vienna glazing bar with glued ghost bar, decorative bar inside glass unit.



DIMENSIONS:

Maximum frame width 6500 mm


Sash rebate width (sliding frame) 760-3235 mm

Sash rebate height (sliding frame) 690-2670 mm

Maximum sash weight 300 kg

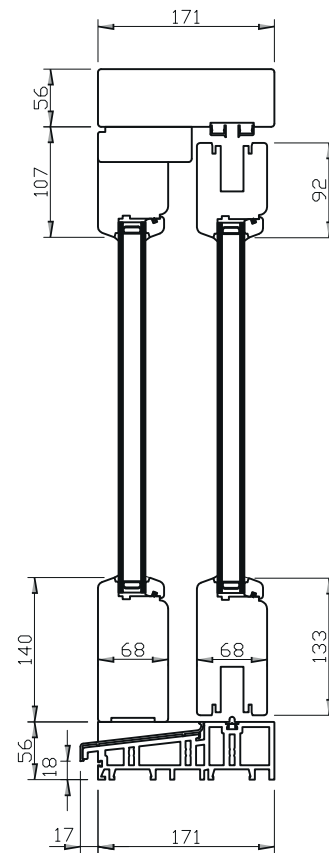

Glazing bar
100 mm,
78 mm,
60 mm

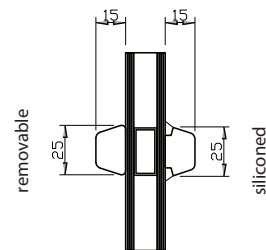

Vienna glazing bar with
ghost bar:
25 mm



Decorative bar inside
glass unit:
26 mm,
18 mm,
7,5 mm

OPENING SCHEMES

