


WOODEN DK WINDOWS

Inward opening DK wooden windows have many advantages compared to other products because of their functionality. The windows have both turn and tilt opening plus are equipped with a micro-ventilation solution and are very easily adjustable if needed. The possibility to choose from three different profile thicknesses enables us to provide the best solution for warm climates or summer cottages to passive houses alike.

TECHNICAL DATA

| | IV68 Window | IV78 Window | IV92 Window |
|--|--------------------------------|---|---|
| Opening style | Inward (DK) | Inward (DK) | Inward (DK) |
| Thermal transmittance coefficient (U-value) (for standard 1230x1480mm openable window) (wood – pine) | Uw=1,4 W/m2K | Uw=0,89 W/m2K | Uw=0,78 W/m2K |
| Thermal transmittance coefficient (U-value) (for standard 1230x1480mm non-openable window) (wood – pine) | Uw=1,3 W/m2K | Uw=0,83 W/m2K | Uw=0,7 W/m2K |
| Glazing (standard solution) | 2k 4-18ar-4es (Ug - 1,1 W/m2K) | 3k 4es-14ChrU ar-4-14ChrU ar- 4es (Ug-0,6 W/m2K) | 3k 4es-18ChrU ar-4-18ChrU ar- 4es (Ug-0,5 W/m2K) |
| Sound reduction value (standard solution) | Rw (C, Ctr) 33 (-1, -4) dB | Rw (C,Ctr) 34 (-1,-4) dB | Rw (C, Ctr) 33 (-1, -7) dB |
| Depth of frame and sash | 68 mm | 78 mm | 92 mm |
| Glazing thickness | 24-30 (standard 26mm) | 34 - 40 mm (standard 40mm) | 48-54 mm (standard 48mm) |
| Air permeability | Class 4 | Class 4 | Class 4 |
| Resistance to wind load | C5 | C5 | C5 |
| Water tightness | E900 | E900 | E900 |

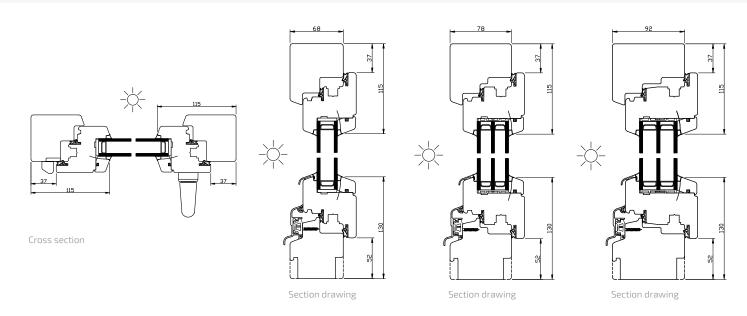



FINISHING

STANDARD TRANSPARENT LASURS



















STANDARD OPAQUE COLOURS



Pure White









RAL 7040 -RAL 7024 -Window Grey Graphite Grey Grey Brown

MATERIALS








Pine

Meranti

OPENING STYLES



Tilt and turn opening window width 410-1710mm, height 410-2720mm.

Scan QR-code for working principle



GLAZING

Good glazing is an essential part of any good window. In addition to the excellent energy saving characteristics quality glass units nowadays have, they offer many possibilities for comfort and protection. In our products it is possible to choose as extra between tempered and laminated glazing for protection, solar protection glazing to keep away the hot summer sun, sound reduction glasses as well as selfcleaning glazing. A well thought through glazing package ensures comfortable living for many years.



HANDLES

A well picked handle is for a window like an icing on a cake working both as an interior design element and a functional tool. We supply handles in a variety of colours from a wide range of handle types from which it is easy to choose a



ASK FOR MORF

Lasita Aken AS

TALLINN, Pärnu mnt 158, 11317 Tel. +372 65 65 405 TARTU, Tähe 133c, 51013 Tel. +372 7362 791 RĪGA, Latvia, Daugavgrīvas iela 23, Tel. +371 26193638

E-mail: lasita@lasita.ee Home page: www.lasita.ee

Reg. code: 10164470 VAT no: EE100016486

